



End Mill for Titanium Alloy

UVX-TI-SERIES

Volume 3.1



KEY FEATURES: OSG END MILL FOR TITANIUM ALLOY



1 Unequal spacing, variable lead
Superior suppression of vibration

2 Available in 4 or 5 flutes


3 Optimal flute shape
Smooth evacuation of chips

4 Web Taper
High efficient milling is achieved
by increasing rigidity

UVX + SAFE-LOCK™ -THE PULL OUT PROTECTION

The unique Safe-Lock™ design in cutting tools and tool holders combines a high precision press fit clamping with a positive form locking mechanism. This prevents round cutting tools from being rotated or completely pulled out from its tool holder during heavy machining.

The combination of symmetrical pull out protection, highest concentricity and excellent balance of the Safe-Lock™ system, results in a vibration free machining process. This leads to a more efficient metal removal rate, that is superior when compared to conventional Milling chucks or Weldon shanked cutting tools and tool holders.

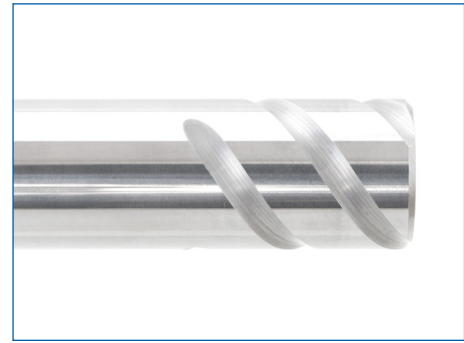

The Safe-Lock™ design is now available on the UVX end mill series.

- For High Performance Cutting (HPC)
- Highly accurate clamping due to shrink fit technology
- High torque due to form closed clamping
- No loss of accuracy
- No pull out of the tool
- No spinning of the tool
- No damages on work piece or machine
- Groove on tool shank is directed so that tool will be pulled into the chuck (depending on direction of rotation)



CUTTING DATA



Milling Method and Features

Stable and high efficiency milling of titanium alloy is now possible! UVX series offers solutions for slot milling to easily chatter complicated pocket milling.

	Feature	Slot Milling	Side Milling	
			Depth under 3D	Depth over 3D, under 5D
UVX-TI-5FL	Multi-purpose short type, 5FL	○	◎	×
UVXL-TI-5FL	High efficient long type, 5FL	△	◎	◎

◎ Best ○ Good × Not recommended △ Fair


Stable high feed milling is achieved by suppressing vibration with high rigidity

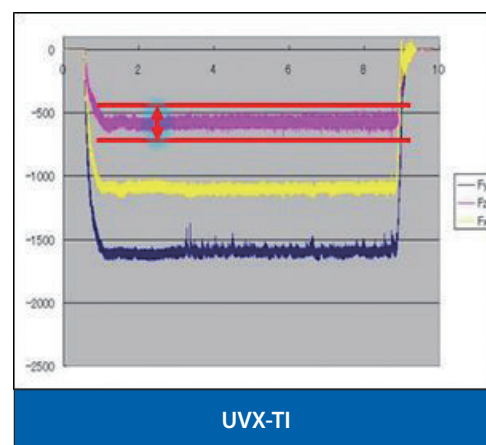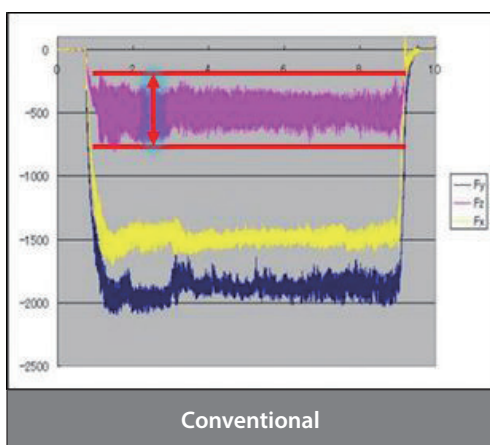

Pocket Milling of UVX(L)-TI-5FL

The UVX-TI Series can finish wall surfaces with single cutting and offers a seamless, beautiful cutting surface, thanks to vibration-free cutting


Tool	UVX-TI-5FL	UVXL-TI-5FL
Size	Ø 16 X R3	Ø 12 X R1
Work Material	Ti-6Al-4V	
Cutting Speed	55 m/min (1.100 min ⁻¹)	70 m/min (1.850 min ⁻¹)
Feed Rate	550 mm/min (0,1 mm/t)	650 m/min (0.07 min ⁻¹)
Milling Method	Pocket Milling	
Depth of Cut	ap=16 mm ae=9,6 mm	ap=45 mm ae=0,2 mm
M.R.R.	85 cm ³ /min	6 cm ³ /min
Coolant	Water Soluble	
Overhang Length	50 mm	
Machine	5-axis Machining Center (HSK-A63)	

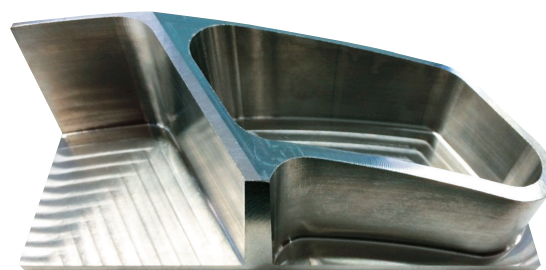


MACHINING DATA

Long Tool Life of UVX-TI-5FL

Tool	UVX-TI-5FL Ø 12 X R 1
Work Material	Ti-6Al-4V (35HRC)
Cutting Speed	100 m/min (2.500 min ⁻¹)
Feed Rate	625 mm/min (0,05 mm/t)
Milling Method	Side Milling
Depth of Cut	ap=6,35 mm (0,5D) ae=3,81 mm (0,3D)
Coolant	Water Soluble
Machine	Vertical Machining Center (BT40)

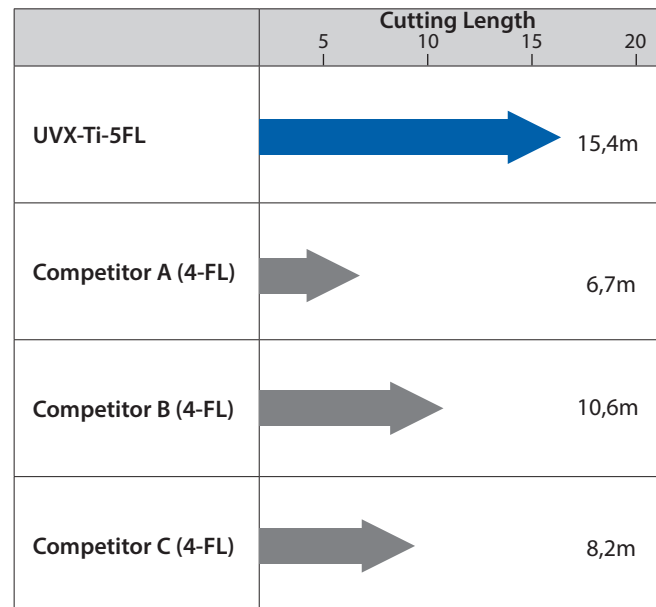


After 10,5m of Milling

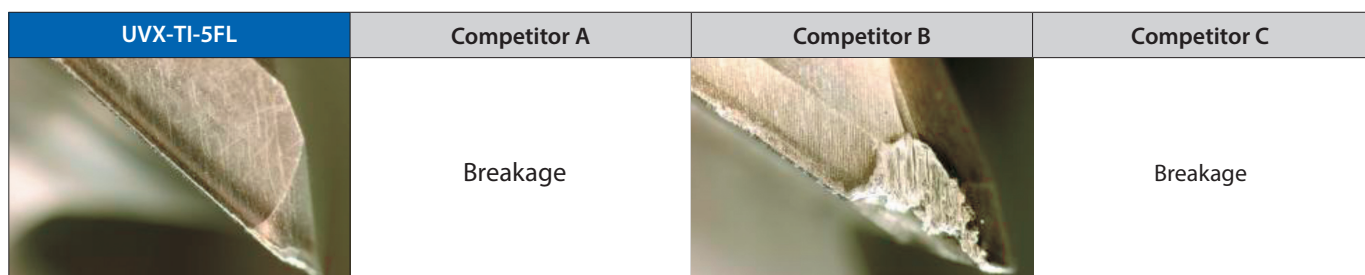

The UVX-TI-5FL has outstanding resistance against fracture and can cut materials with excellent stability.

UVXL-TI-5FL Superior efficiency of side milling



	General cutting condition	Condition with max. feed rate
Tool	UVXL-TI-5FL Ø 12 X R 1	
Work Material	Ti-6Al-4V (32HRC)	
Cutting Speed	70 m/min (1.857 min ⁻¹)	70 m/min (1.857 min ⁻¹)
Feed Rate	1.114 mm/min (0,12 mm/t)	3.157 mm/min (0,34 mm/t)
Milling Method	Side Milling	
Depth of Cut	ap=0,48 mm ae=1,2 mm	
M.R.R.	64cm ³ /min	182cm ³ /min
Coolant	Water Soluble	
Machine	Horizontal Machining Center (BT40)	
Holder	Shrink Holder	

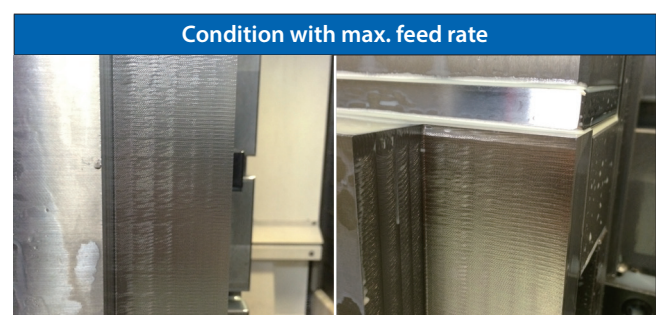

Deep side milling of titanium alloy with UVXL-TI-5FL Ø12. Under the cutting cond. of maximized feed rate, astounding result of M.R.R. = 182 cm³/min and fz=0.34 mm/t were achieved.

UVX-TI-4FL

Milling | Solid carbide

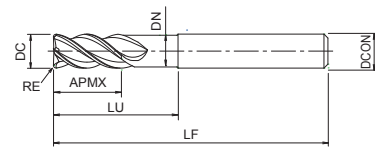

- First choice in quality and performance
- Carbide end mill with TiAlN coating
- For Titanium alloys
- 4 flutes, variable helix and unequal spacing, corner radius





Milling | Solid carbide



EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
8555120	4	12	-	36	90	24	12	11,5
8555121	4	12	1	36	90	24	12	11,5
8555122	4	12	1,5	36	90	24	12	11,5
8555123	4	12	2	36	90	24	12	11,5
8555124	4	12	2,5	36	90	24	12	11,5
8555125	4	12	3	36	90	24	12	11,5
8555126	4	12	4	36	90	24	12	11,5
8555160	4	16	-	48	100	32	16	15,5
8555161	4	16	1	48	100	32	16	15,5
8555162	4	16	1,5	48	100	32	16	15,5
8555163	4	16	2	48	100	32	16	15,5
8555164	4	16	2,5	48	100	32	16	15,5
8555165	4	16	3	48	100	32	16	15,5
8555166	4	16	4	48	100	32	16	15,5
8555200	4	20	-	60	120	40	20	19,5
8555201	4	20	1	60	120	40	20	19,5
8555202	4	20	1,5	60	120	40	20	19,5
8555203	4	20	2	60	120	40	20	19,5
8555204	4	20	2,5	60	120	40	20	19,5
8555205	4	20	3	60	120	40	20	19,5
8555206	4	20	4	60	120	40	20	19,5
8555207	4	20	5	60	120	40	20	19,5
8555250	4	25	-	75	140	50	25	24,5
8555251	4	25	1	75	140	50	25	24,5
8555252	4	25	1,5	75	140	50	25	24,5
8555253	4	25	2	75	140	50	25	24,5
8555254	4	25	2,5	75	140	50	25	24,5
8555255	4	25	3	75	140	50	25	24,5
8555256	4	25	4	75	140	50	25	24,5
8555257	4	25	5	75	140	50	25	24,5
8555258	4	25	6	75	140	50	25	24,5

UVX-TI-5FL

Milling | Solid carbide



- First choice in quality and performance
- Carbide end mill with TiAlN coating
- For Titanium alloys
- 5 flutes, variable helix and unequal spacing, corner radius





Milling | Solid carbide



EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
8555320	5	12	-	36	90	24	12	11,5
8555321	5	12	1	36	90	24	12	11,5
8555322	5	12	1,5	36	90	24	12	11,5
8555323	5	12	2	36	90	24	12	11,5
8555324	5	12	2,5	36	90	24	12	11,5
8555325	5	12	3	36	90	24	12	11,5
8555326	5	12	4	36	90	24	12	11,5
8555360	5	16	-	48	100	32	16	15,5
8555361	5	16	1	48	100	32	16	15,5
8555362	5	16	1,5	48	100	32	16	15,5
8555363	5	16	2	48	100	32	16	15,5
8555364	5	16	2,5	48	100	32	16	15,5
8555365	5	16	3	48	100	32	16	15,5
8555366	5	16	4	48	100	32	16	15,5
8555400	5	20	-	60	120	40	20	19,5
8555401	5	20	1	60	120	40	20	19,5
8555402	5	20	1,5	60	120	40	20	19,5
8555403	5	20	2	60	120	40	20	19,5
8555404	5	20	2,5	60	120	40	20	19,5
8555405	5	20	3	60	120	40	20	19,5
8555406	5	20	4	60	120	40	20	19,5
8555407	5	20	5	60	120	40	20	19,5
8555450	5	25	-	75	140	50	25	24,5
8555451	5	25	1	75	140	50	25	24,5
8555452	5	25	1,5	75	140	50	25	24,5
8555453	5	25	2	75	140	50	25	24,5
8555454	5	25	2,5	75	140	50	25	24,5
8555455	5	25	3	75	140	50	25	24,5
8555456	5	25	4	75	140	50	25	24,5
8555457	5	25	5	75	140	50	25	24,5
8555458	5	25	6	75	140	50	25	24,5

UVX-TI-5FL SAFE LOCK

Milling | Solid carbide



- First choice in quality and performance
- Carbide end mill with TiAlN coating
- For Titanium alloys
- 5 flutes, variable helix and unequal spacing, corner radius
- SafeLock shank





Milling | Solid carbide



EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
48247120	5	12	-	36	90	24	12	11,5
8555670	5	12	1	36	90	24	12	11,5
48247123	5	12	1,5	36	90	24	12	11,5
48247124	5	12	2	36	90	24	12	11,5
48247125	5	12	2,5	36	90	24	12	11,5
8555671	5	12	3	36	90	24	12	11,5
48247127	5	12	4	36	90	24	12	11,5
48247160	5	16	-	48	100	32	16	15,5
8555672	5	16	1	48	100	32	16	15,5
48247163	5	16	1,5	48	100	32	16	15,5
48247164	5	16	2	48	100	32	16	15,5
48247165	5	16	2,5	48	100	32	16	15,5
8555673	5	16	3	48	100	32	16	15,5
48247167	5	16	4	48	100	32	16	15,5
48247200	5	20	-	60	120	40	20	19,5
8555674	5	20	1	60	120	40	20	19,5
48247203	5	20	1,5	60	120	40	20	19,5
48247204	5	20	2	60	120	40	20	19,5
48247205	5	20	2,5	60	120	40	20	19,5
8555675	5	20	3	60	120	40	20	19,5
48247207	5	20	4	60	120	40	20	19,5
8555676	5	20	5	60	120	40	20	19,5
48247250	5	25	-	75	140	50	25	24,5
8555677	5	25	1	75	140	50	25	24,5
48247253	5	25	1,5	75	140	50	25	24,5
48247254	5	25	2	75	140	50	25	24,5
48247255	5	25	2,5	75	140	50	25	24,5
8555678	5	25	3	75	140	50	25	24,5
48247257	5	25	4	75	140	50	25	24,5
8555679	5	25	5	75	140	50	25	24,5
48247259	5	25	6	75	140	50	25	24,5

UVXL-TI-5FL

Milling | Solid carbide



- First choice in quality and performance
- Carbide end mill with TiAlN coating
- For Titanium alloys
- 5 flutes, long length of cut, variable helix and unequal spacing, corner radius





EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
8555520	5	12	-	60	110	48	12	11,5
8555521	5	12	1	60	110	48	12	11,5
8555522	5	12	1,5	60	110	48	12	11,5
8555523	5	12	2	60	110	48	12	11,5
8555524	5	12	2,5	60	110	48	12	11,5
8555525	5	12	3	60	110	48	12	11,5
8555526	5	12	4	60	110	48	12	11,5
8555560	5	16	-	80	130	64	16	15,5
8555561	5	16	1	80	130	64	16	15,5
8555562	5	16	1,5	80	130	64	16	15,5
8555563	5	16	2	80	130	64	16	15,5
8555564	5	16	2,5	80	130	64	16	15,5
8555565	5	16	3	80	130	64	16	15,5
8555566	5	16	4	80	130	64	16	15,5
8555600	5	20	-	100	160	80	20	19,5
8555601	5	20	1	100	160	80	20	19,5
8555602	5	20	1,5	100	160	80	20	19,5
8555603	5	20	2	100	160	80	20	19,5
8555604	5	20	2,5	100	160	80	20	19,5
8555605	5	20	3	100	160	80	20	19,5
8555606	5	20	4	100	160	80	20	19,5
8555607	5	20	5	100	160	80	20	19,5
8555650	5	25	-	125	190	100	25	24,5
8555651	5	25	1	125	190	100	25	24,5
8555652	5	25	1,5	125	190	100	25	24,5
8555653	5	25	2	125	190	100	25	24,5
8555654	5	25	2,5	125	190	100	25	24,5
8555655	5	25	3	125	190	100	25	24,5
8555656	5	25	4	125	190	100	25	24,5
8555657	5	25	5	125	190	100	25	24,5
8555658	5	25	6	125	190	100	25	24,5

Milling | Solid carbide



UVXL-TI-5FL SAFE LOCK

Milling | Solid carbide



- First choice in quality and performance
- Carbide end mill with TiAlN coating
- For Titanium alloys
- 5 flutes, long length of cut, variable helix and unequal spacing, corner radius
- SafeLock shank



Milling | Solid carbide





EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
48248120	5	12	-	60	110	48	12	11,5
8555680	5	12	1	60	110	48	12	11,5
48248123	5	12	1,5	60	110	48	12	11,5
48248124	5	12	2	60	110	48	12	11,5
48248125	5	12	2,5	60	110	48	12	11,5
8555681	5	12	3	60	110	48	12	11,5
48248127	5	12	4	60	110	48	12	11,5
48248160	5	16	-	80	130	64	16	15,5
8555682	5	16	1	80	130	64	16	15,5
48248163	5	16	1,5	80	130	64	16	15,5
48248164	5	16	2	80	130	64	16	15,5
48248165	5	16	2,5	80	130	64	16	15,5
8555683	5	16	3	80	130	64	16	15,5
48248167	5	16	4	80	130	64	16	15,5
48248200	5	20	-	100	160	80	20	19,5
8555684	5	20	1	100	160	80	20	19,5
48248203	5	20	1,5	100	160	80	20	19,5
48248204	5	20	2	100	160	80	20	19,5
48248205	5	20	2,5	100	160	80	20	19,5
8555685	5	20	3	100	160	80	20	19,5
48248207	5	20	4	100	160	80	20	19,5
8555686	5	20	5	100	160	80	20	19,5
48248250	5	25	-	125	190	100	25	24,5
8555687	5	25	1	125	190	100	25	24,5
48248253	5	25	1,5	125	190	100	25	24,5
48248254	5	25	2	125	190	100	25	24,5
48248255	5	25	2,5	125	190	100	25	24,5
8555688	5	25	3	125	190	100	25	24,5
48248257	5	25	4	125	190	100	25	24,5
8555689	5	25	5	125	190	100	25	24,5
48248259	5	25	6	125	190	100	25	24,5

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions



UVX-TI-4FL / SAFE-LOCK®

Titanium alloy (Ti-6Al-4V)

	Side milling		Slotting							
Vc	60 ~ 80 m/min		30 ~ 50 m/min							
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)						
12	1.900	680	1.350	270						
16	1.400	500	990	200						
20	1.100	480	800	190						
25	900	400	640	150						
Max cutting depth		<table border="1"><tr><td>ap</td><td>ae</td></tr><tr><td>≤ 1,8 Dc</td><td>0,2 Dc</td></tr></table>	ap	ae	≤ 1,8 Dc	0,2 Dc		<table border="1"><tr><td>ap</td></tr><tr><td>≤ 1 Dc</td></tr></table>	ap	≤ 1 Dc
ap	ae									
≤ 1,8 Dc	0,2 Dc									
ap										
≤ 1 Dc										


UVX-TI-5FL / UVX-TI-5FL-HB / SAFE-LOCK®

Titanium alloy (Ti-6Al-4V)

	Side milling		Slotting							
Vc	60 ~ 80 m/min		30 ~ 50 m/min							
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)						
12	1.900	855	1.350	340						
16	1.400	630	990	250						
20	1.100	600	800	240						
25	900	500	640	192						
Max cutting depth		<table border="1"><tr><td>ap</td><td>ae</td></tr><tr><td>≤ 1,8 Dc</td><td>0,2 Dc</td></tr></table>	ap	ae	≤ 1,8 Dc	0,2 Dc		<table border="1"><tr><td>ap</td></tr><tr><td>≤ 1 Dc</td></tr></table>	ap	≤ 1 Dc
ap	ae									
≤ 1,8 Dc	0,2 Dc									
ap										
≤ 1 Dc										

UVXL-TI-5FL / SAFE-LOCK®

Titanium alloy (Ti-6Al-4V)

	Side milling					
Vc	60 ~ 80 m/min					
Ø	S (min ⁻¹)	F (mm/min)				
12	2.100	1.050				
16	1.600	920				
20	1.270	760				
25	1.020	587				
Max cutting depth		<table border="1"><tr><td>ap</td><td>ae</td></tr><tr><td>≤ 3,75 Dc</td><td>0,1 Dc</td></tr></table>	ap	ae	≤ 3,75 Dc	0,1 Dc
ap	ae					
≤ 3,75 Dc	0,1 Dc					

Milling | Endmills



Cutting conditions

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö
Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde
Denmark
Tel: +45 46 75 65 55
osg@osg-scandinavia.com

OSG NETHERLANDS

Bedrijfsweg 5
3481 MG Harmelen
The Netherlands
Tel: +31 348 44 2764
info@osg-nl.com

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton
United Kingdom
Tel: +44 (0) 1827 720 013
uk_sales@osg-uk.com

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord
Belgium
Tel: +32 10 23 05 07
info@osgeurope.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord
Belgium
Tel: +32 10 23 05 11
info@osg-belgium.com

OSG IBÉRICA


Bekolarra 4
E - 01010 Vitoria-Gasteiz
Spain
Tel: +34 945 242 400
osg.iberica@osg-ib.com

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte
France
Tel: +33 1 49 90 10 10
sales@osg-france.com

OSG ITALY

Via Ferrero, 65 A/B
I - 10098 Rivoli
Italy
Tel: +39 0117705211
info@osg-italia.it

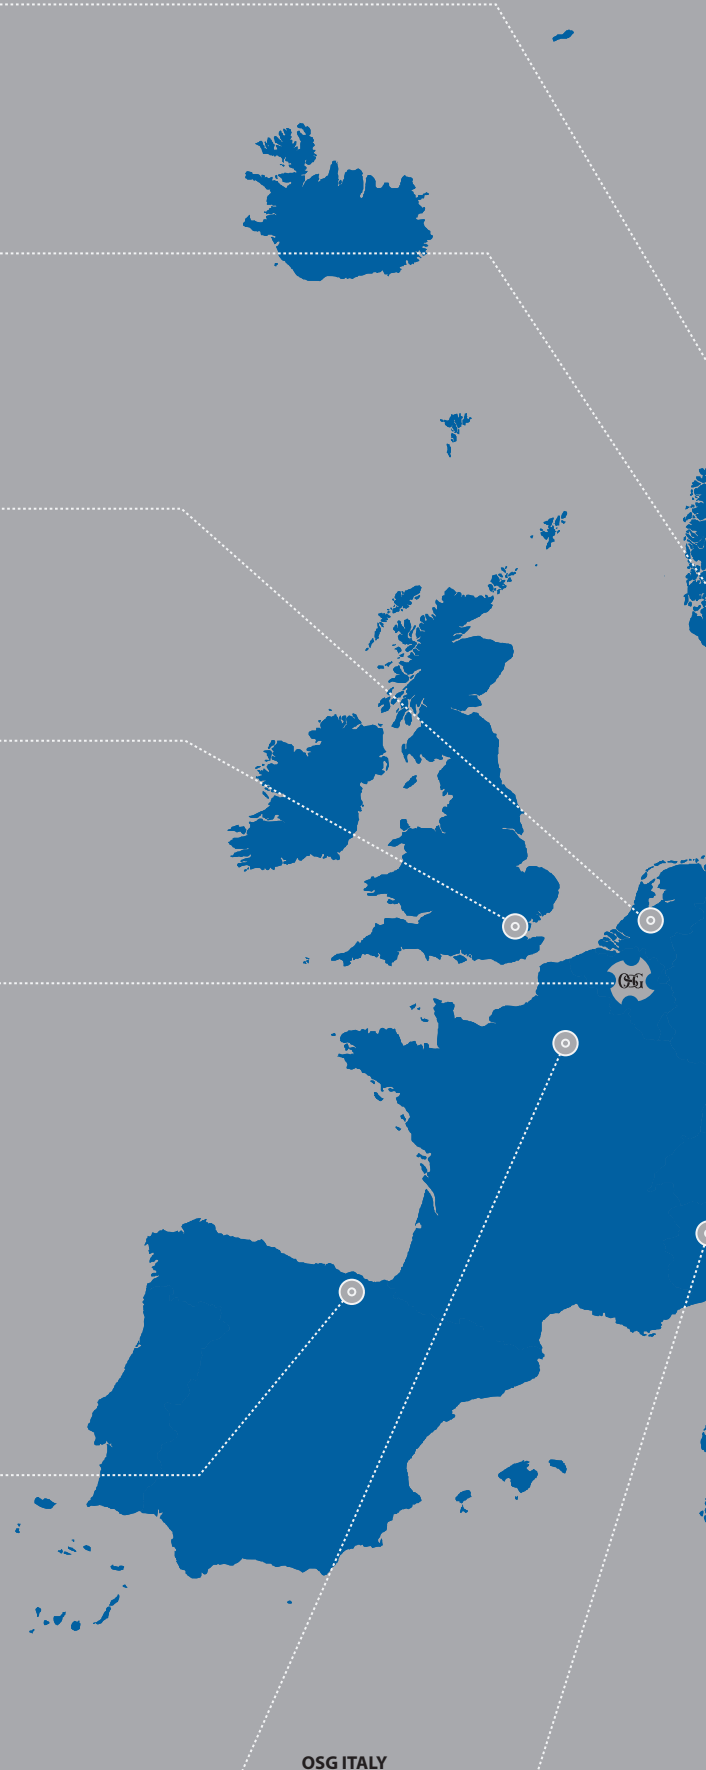

OSG IN EUROPE

CZECH REPUBLIC, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia, organizačná zložka
Račianska 22/A, Bratislava 831 02
Slovakia
Tel.: +421 24 32 91 295
info@osgeurope.com

OSG POLAND

ul. Spółdzielcza 57
05-074 Halinów
Polska
Tel: +22 760 82 71
Mob. +48 570 677 711
osg@osg-poland.com

OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)
051431 Bucuresti
România
Tel: +40 21 322 07 47
info@osgromania.ro

OSG TURKEY

Rami Kışla Cad.No:56 Eyüp
Istanbul 34056
Turkey
Tel: +90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
Switzerland
Tel.: +41 44 802 15 15
info@vb-tools.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen
Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de



shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
info@osgeurope.com

OSG POLAND Sp. z o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
osg@osg-poland.com

OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)
051431 Bucuresti - România
Tel: +40 21 322 07 47
info@osgromania.ro

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
info@osg-belgium.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
info@osg-germany.de

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
sales@osg-france.com

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
osg@osg-scandinavia.com

OSG ITALIA

Via Ferrero, 65 A/B3
I - 10098 Rivoli - Italy
Tel: +39 0117705211
info@osg-italia.it

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
info@osg-nl.com

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö - Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
T +41 44 802 15 15
info@vb-tools.com

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton, United Kingdom.
Tel: +44 1827 720 013
uk_sales@osg-uk.com

OSG IBERICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
osg.iberica@osg-ib.com

CZECH, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia organizacna zlozka
Racianská 22/A, SK-83102 Bratislava
Slovakia
Tel. +421 24 32 91 295
Orders-osgsvk@osgeurope.com

OSG TURKEY

Rami Kışla Cad.No:56 Eyüp
Istanbul 34056 - Turkey
Tel:+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

OSG EUROPE LOGISTICS S.A.

04/2019 - All rights reserved. © OSG Europe 2019

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com

